

Steambath Control Model: EC-150

Product Information – EC-150

1 year parts warranty

Preset time and programmable temperature.

Digital display of ambient and set temperature.

Icons for system status - heating and set temp.

Dimensions: 23/4" x 23/4"

Package Includes: Control, 35-Ft. multi-conductor cable, 6-Pin coupler, 3199 series steamhead, strain relief clamp, silicone

sealant, installation and operating instructions.


Required Electrical Service: Low-voltage connection from

ES generator via multi-conductor cable (supplied).

Product No. - Finishes: EC-150-PC - Polished Chrome

EC-150-PN - Polished Nickel

EC-150-BN - Brushed Nickel

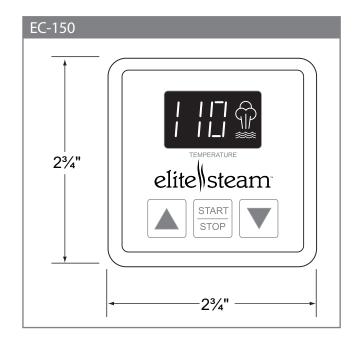

Notes

Installation Notes

Surface Mount - 11/2" hole required.

Mounts inside steam room.


EliteSteam recommends that the multi-conductor cable be run through 3/4" conduit to protect cable from damage and to facilitate easy replacement.


Mount control near seating area and not above steamhead.

Rough-in Notes

Control should be mounted 48" above the floor.

Steamhead to be mounted 12" to 18" above the finished floor or 6" above the rim of the tub and as far from the seating area as possible.

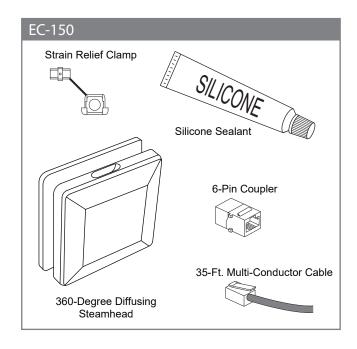



Tel: 800-555-6890

07/18 Pub. No. 1050-B